



PRODUCT CATALOGUE

for Computer & A/V Peripheral

همراه با گارانتی
آسان پیشرو

شرکت آسان پیشرو

☎ 021-58206 | ✉ info@asanpishro.com | 🌐 www.asanpishro.com

📍 تهران، خیابان مطهری، روبروی خیابان فجر، پلاک ۲۱۹ واحد ۱



فروشگاه اینترنتی irugreen

☎ 021 86191810-12 | ✉ info@irugreen.com | 🌐 www.irugreen.com



درباره یوگرین

UGREEN

UGREEN یک شرکت فعال در زمینه‌ی تولید محصولات الکترونیکی در کشور چین است که با بهره‌گیری از تکنولوژی‌های روز دنیا، محصولاتی با کیفیت فنی بالا و ظاهری زیبا مطابق نیاز بازار تولید و عرضه می‌کند.

از زمان تأسیس شرکت **UGREEN** در سال ۲۰۱۲، این شرکت همواره در تولید لوازم جانبی کامپیوتر و تلفن همراه از برندهای پیشتاز جهان بوده و محصولات این کمپانی در سراسر جهان، از اروپا و آمریکا تا شرق و غرب آسیا و شمال آفریقا توسط نمایندگان و دفاتر عرضه‌ی این برند به مشتریان عمده و مصرف‌کنندگان به فروش می‌رسد. امروزه **UGREEN** به یک برند مطرح برای بیش از ۴۰ میلیون کاربر در بیش از ۱۰۰ کشور جهان تبدیل شده است.

فرهنگ سازمانی **UGREEN** به نحوی بوده است که همواره در تمامی بخش‌های شرکت از جمله R&D، طراحی و تولید، فروش و خدمات پس از فروش نظرات مشتریان و کاربران، لایه‌های مختلف عرضه‌ی محصول در بازار و ارزش‌های انسانی را سرلوحه‌ی کار خود قرار داده است. چشم انداز **UGREEN** راحت‌تر شدن استفاده از تجهیزات الکترونیک و تجربه‌ی کاربری بهتر در بهره‌مندی از تکنولوژی‌های روز دنیا برای کاربران است.


یوگرین در ایران

در سال‌های گذشته **UGREEN** توسط کانال‌های مختلف در بازار ایران عرضه شده است و از سال ۱۳۹۸ شرکت **نوآوران آسان پیشرو**، اقدام به تأمین و ارائه‌ی گارانتی معتبر بر سبد جامعی از محصولات این برند کرده است.

مشتریان در سطوح مختلف بازار، از مجریان پروژه و عمده فروشان تا مصرف‌کنندگان نهایی، از امروز می‌توانند از سرویس‌های شرکت **نوآوران آسان پیشرو** بر این برند بهره‌مند شوند.

UGREEN 绿联

UGREEN

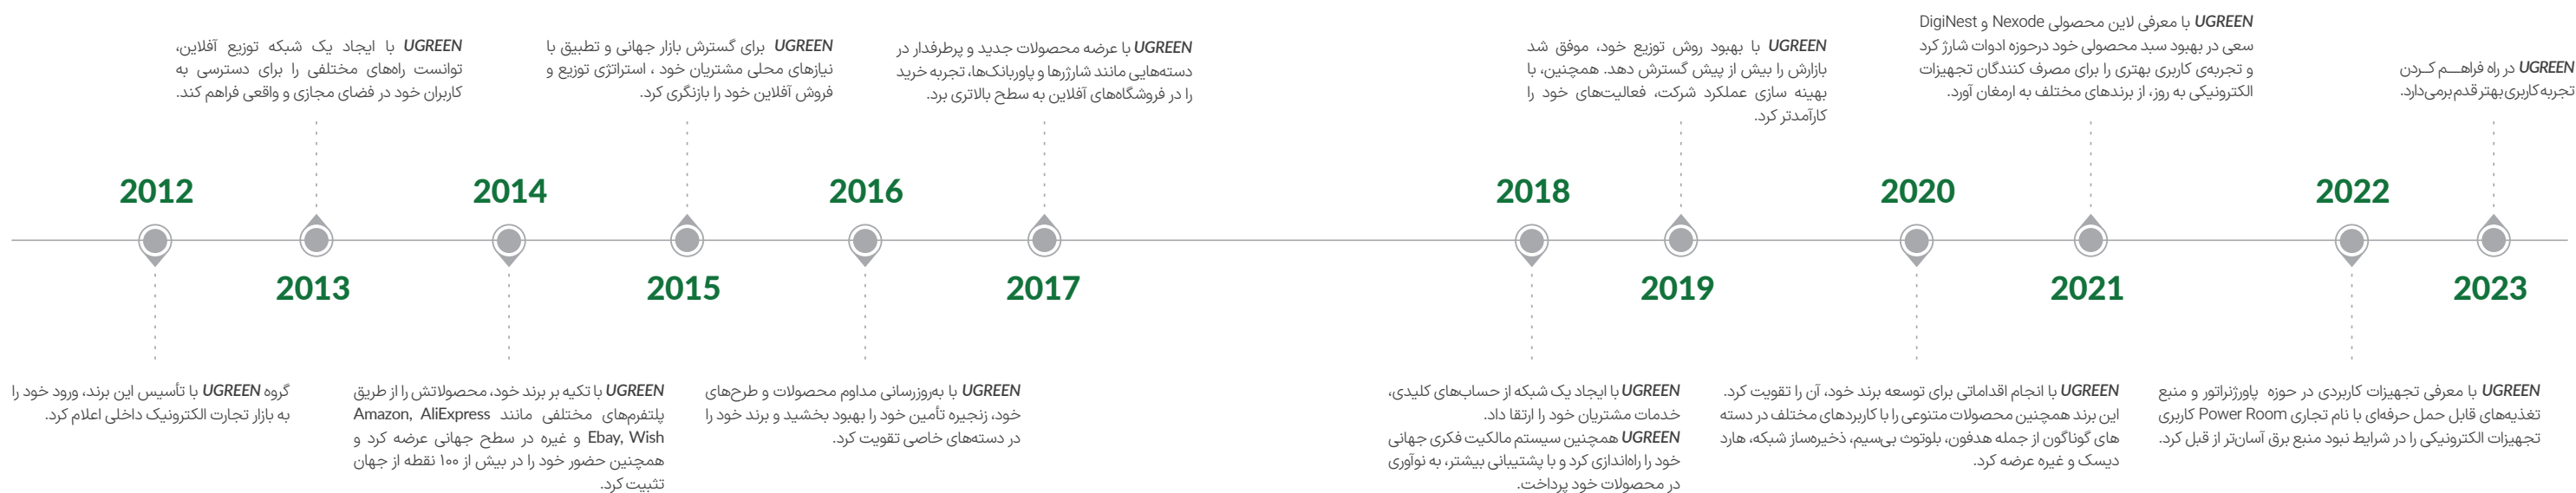

فضای کارگاه

افتخارات و گواهینامه ها



APTX Certificate



BQB Certificate




Qualcomm Quick Charge Certificate



Qi Certificate



TELEC Certificate



CE Certificate



FCC Certificate



ROHS Certificate




PSE Certificate



SRRC Certificate



IF Design Award




Red Dot Design Award



Contemporary Good Design Award



Red Star Design Award



USPTO Certificate



CNIPA Patent Of Utility Models



CNIPA Patent Of Invention



EUIPO Certificate Of Registration



**MARKET
COVERAGE**

100+
Countries

North America	USA, Canada, Mexico
South America	Brazil, Chile, Peru
Europe	Germany, UK, Poland, Russia, Portugal
Middle East	Saudi Arabia, UAE, Kuwait, Turkey, Iran
Africa	South Africa, Egypt
East Asia	China, Japan, South Korea
Southeast Asia	Vietnam, Thailand, Malaysia, Indonesia
South Asia	India, Bangladesh

Key markets by country include but are not limited to the list above

شرکای تجاری |

نمایشگاهها |





نمایندگان فروش آسان پیشرو

تامین نیاز بازار، ارائه‌ی خدمات
پس از فروش حرفه‌ای و جلب
رضایت بازار از اصلی‌ترین اهداف
تیم نوآوران آسان پیشرو است.

درباره آسان پیشرو |

شرکت نوآوران آسان پیشرو از اردیبهشت سال ۱۳۹۸ فعالیت خود را به صورت تخصصی آغاز کرد. آسان پیشرو در ابتدا به فروشگاه اینترنتی ایزی مارکت خلاصه می‌شد. اما بعد از مدتی به عنوان یک شرکت بازرگانی و نماینده رسمی تندا (Tenda) فعالیت خود را ادامه داد. شرکت نوآوران آسان پیشرو در حال حاضر نماینده رسمی برند تندا و ارائه دهنده گارانتی رسمی و خدمات پس از فروش معتبر برای این برند است. نوآوران آسان پیشرو توانسته با ارائه خدمات باکیفیت اعتماد مصرف کنندگان و مشتریان تجهیزات شبکه و IT را جلب نماید. شرکت نوآوران آسان پیشرو علاوه بر فعالیت در حوزه آی تی و تأمین کالاهای شبکه در زمینه لوازم جانبی موبایل، کامپیوتر و گجت‌های گیمینگ و لایف استایل فعالیت دارد.

شرکای تجاری |

UGREEN

IP-COM

Tenda®
All for better networking.



Boost Your Productivity

Ensure a stable signal and efficient data transfer




Excellent Choices for Home Theaters

Ready to have an immersive visual experience?



Work All Day In Comfort



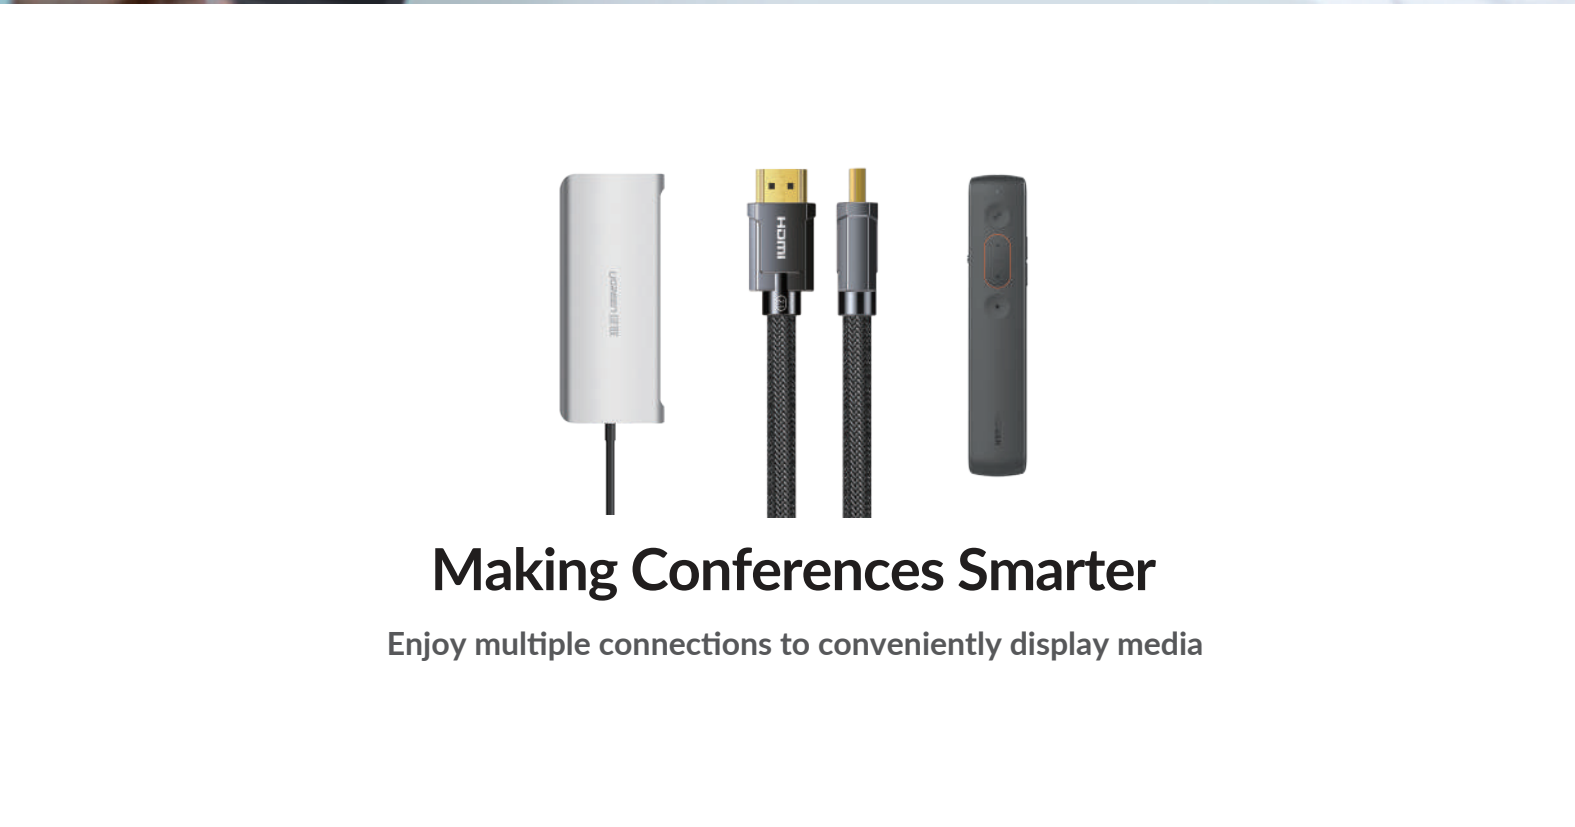

Ergonomic design relieves wrist strain for all-day comfort



Making Conferences Smarter

Enjoy multiple connections to conveniently display media

Video Peripheral

	HDMI Cable & Adapter	17-18
	DP/Mini DP Cable & Adapter	19-20
	VGA/DVI Cable & Adapter	21-22
	Switcher & Splitter & Converter	23-24



Networking Product

	Networking Product	25-26
--	--------------------	-------

Data Storage

	Data Storage	27-28
---	--------------	-------

Audio Peripheral

	Audio Cable & Converter	29-30
	Bluetooth Adapter & Sound Card	31-32

Organizer Gadget

	Organizer Gadget	33-34
---	------------------	-------

Network Attached Storage

	Network Attached Storage	01-02
---	--------------------------	-------




USB-C Docking

	USB-C Docking	03-06
---	---------------	-------

Mouse and Keyboard


	Mouse and Keyboard	07-08
---	--------------------	-------

USB Peripheral

	USB Hub & USB Ethernet Adapter	09-10
	Card Reader	11-12
	USB Cable & Adapter	13-16

فضای ذخیره سازی تحت شبکه یوگرین

فضای ذخیره سازی پیشرفته برای تمام نیازهای شما.
در هر زمان و هر مکان

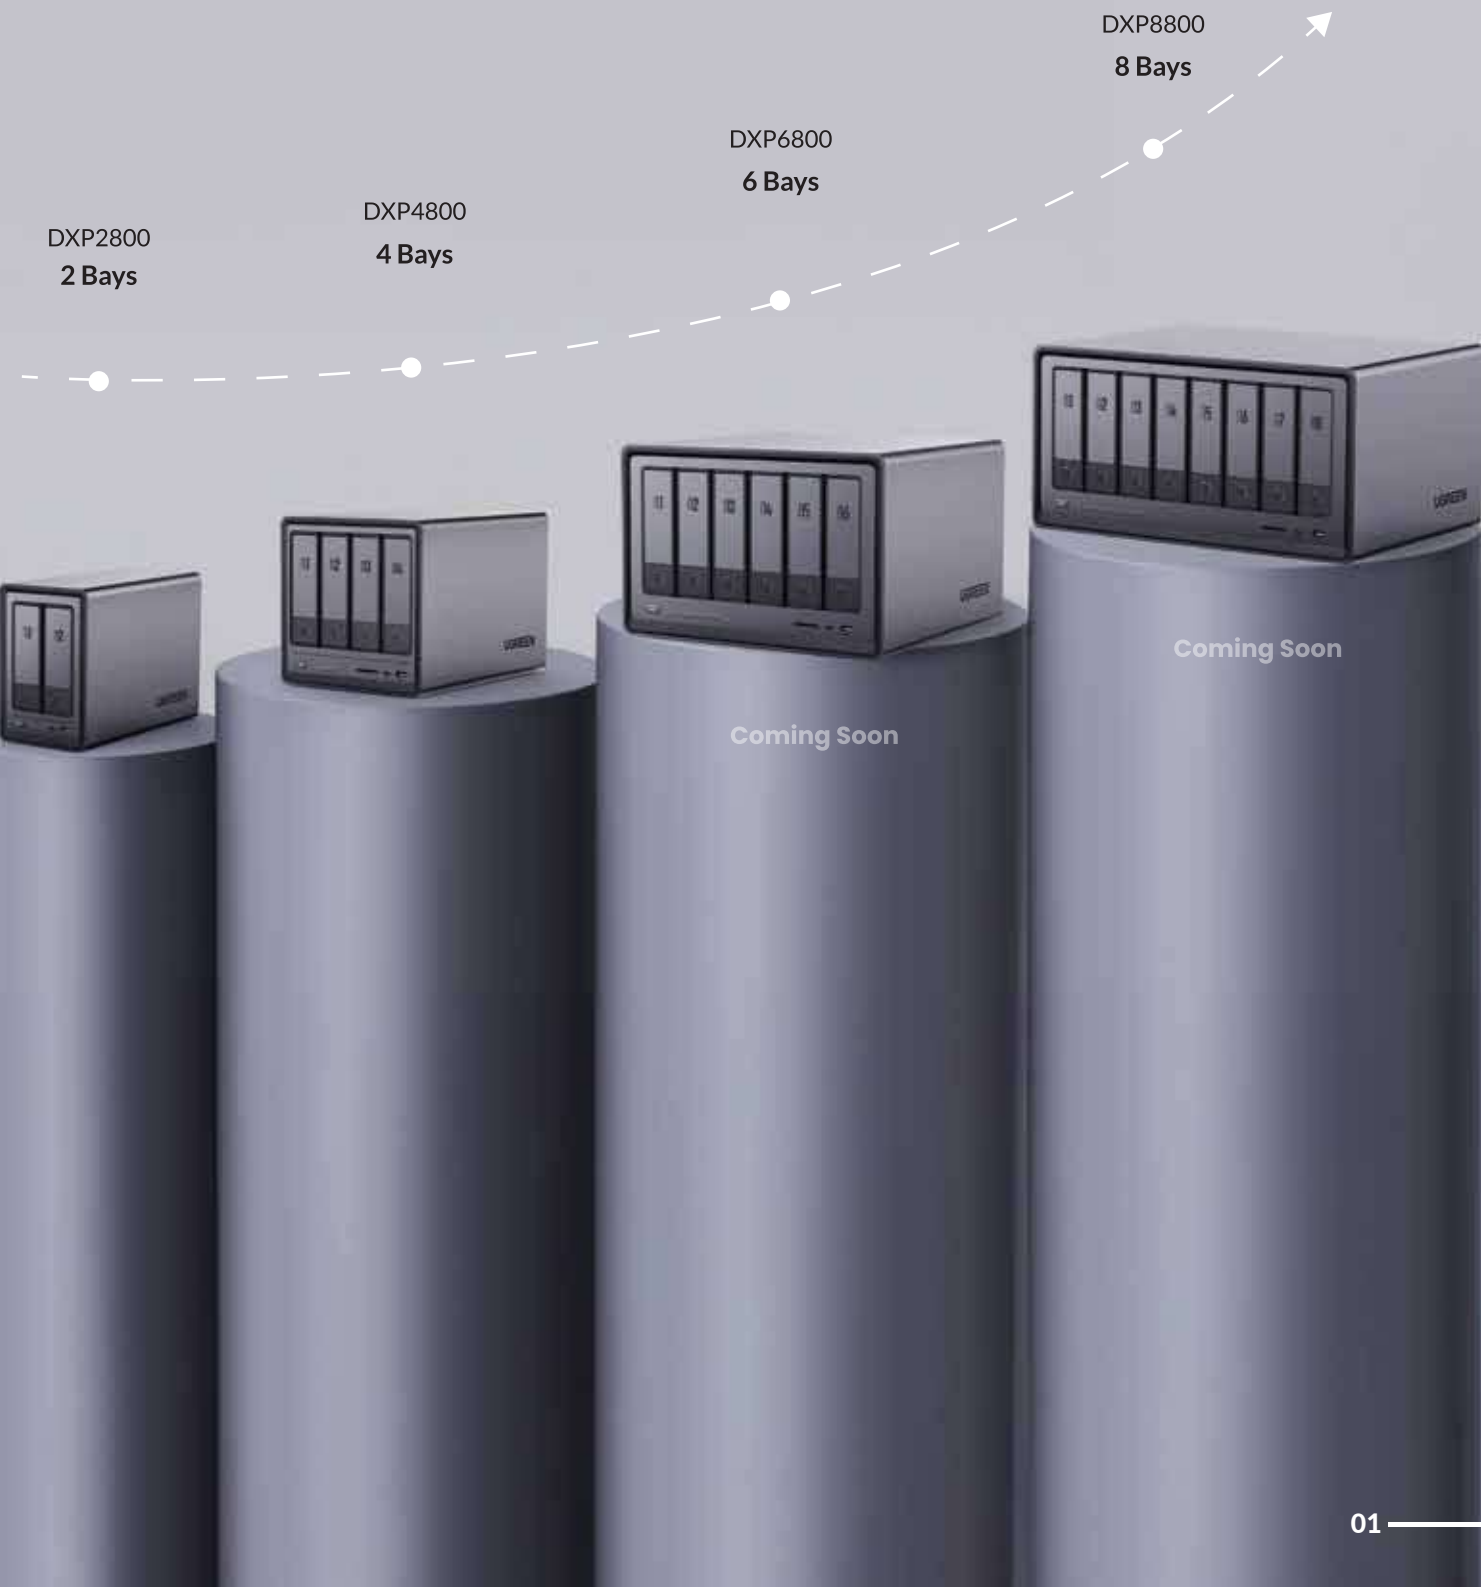

فضای ذخیره سازی تحت شبکه یوگرین

خروجی تصویر HDMI:



با پشتیبانی از پخش ویدئو و عکس با کیفیت بالا و رابط کاربری راحت و شبیه به کامپیوتر، تجربه‌ای کاملاً لذت بخش از تماشای محتوا با وضوح بالا را ارائه می‌دهد.

محافظت کامل از اطلاعات:



بدنه قفل شونده Ugreen NAS از هارد دیسک شما در برابر آسیب‌های ناشی از سقوط محافظت می‌کند و همچنین فایروال داخلی با سیستم امنیتی چند لایه، امنیت اطلاعات شما را تضمین می‌کند.

دسترسی از راه دور:



امکان مشاهده اسناد، عکس‌ها یا ویدیوها در هر زمان و هر مکان از طریق تلفن همراه، تبلت و رایانه را فراهم می‌کند و همچنین دسترسی، اشتراک گذاری و همگام سازی سریع اطلاعات بین سیستم عامل‌ها و دستگاه‌های مختلف را تسهیل می‌کند.

عملکرد پردازشی قدرتمندتر:



پردازنده Intel N100 با فرکانس ۳.۴ گیگاهرتز، سرعت و عملکرد به مراتب بالاتری نسبت به پردازنده N5105 نسل قبل ارائه می‌دهد.

مدیریت چند کاربره و نظارت امنیتی حرفه‌ای:



سیستم عامل انعطاف پذیر با قابلیت مدیریت بر اساس نیاز کاربر، امکان محدود کردن یا اعطای دسترسی به کاربران و یا مشاهده همزمان تصاویر دوربین‌های مداربسته را فراهم می‌سازد.

سرعت انتقال سریعتر:



پورت‌های شبکه کابلی ۲.۵ گیگابیت بر ثانیه به همراه درگاه‌های USB ۳.۲ امکان انتقال اطلاعات با سرعت حداکثر ۱۰ گیگابیت بر ثانیه را فراهم می‌آورند.



5-in-1 USB-C Multifunction Adapter
PID: CM417 20197

- Input: 1xUSB-C
- Output: 1xHDMI, 4xUSB-A
- HDMI: Up to 4K@30Hz
- USB-A: Supports transfer rate of up to 5Gbps
- Compatible Systems: Windows/macOS/Linux



4-in-1 USB-C Multifunction Adapter
PID: CM500 50629

- Input: 1xUSB-C
- Output: 1xHDMI, 3xUSB-A
- HDMI: Up to 8K@30Hz
- USB-A: Supports transfer rate of up to 5Gbps
- Compatible Systems: Windows/macOS/Linux



5-in-1 USB-C Multifunction Adapter
PID: CM500 90376

- Input: 1xUSB-C
- Output: 1xHDMI, 2xUSB-A, 2xUSB-C
- HDMI: Up to 8K@30Hz
- USB-A/USB-C: Supports transfer rate of up to 10Gbps
- Compatible Systems: Windows/macOS/Linux



5-in-1 USB-C Multifunction Adapter
PID: CM478 15495

- Input: 1xUSB-C
- Output: 1xHDMI, 3xUSB-A
- HDMI: Up to 4K@30Hz
- USB-A1: Supports transfer rate of up to 5Gbps
- USB-A2: Supports transfer rate of up to 480Mbps
- USB-C: Supports PD 3.0, 100W Max (does not support data/video streaming)
- Compatible Systems: Windows/macOS/Linux



5-in-1 USB-C Multifunction Adapter
PID: CM511 15596

- Input: 1xUSB-C
- Output: 1xHDMI, 3xUSB-A
- HDMI: Up to 4K@30Hz
- USB-A: Supports transfer rate of up to 5Gbps
- USB-C: Supports PD 3.0, 100W Max (does not support data/video streaming)
- Compatible Systems: Windows/macOS/Linux



5-in-1 USB-C Multifunction Adapter
PID: CM478 90881

- Input: 1xUSB-C
- Output: 1xHDMI, 3xUSB-A, 1x3.5mm
- HDMI: Up to 4K@30Hz
- USB-A: Supports transfer rate of up to 5Gbps
- 3.5mm Output/Input: Available for mics/earphones/speakers
- Compatible Systems: Windows/macOS/Linux



5-in-1 USB-C Multifunction Adapter
PID: CM418 10919

- Input: 1xUSB-C
- Output: 1x HDMI, 2xUSB-A, 1xUSB-C, 1xRJ45
- HDMI I: Up to 4K@60Hz
- RJ45: Up to 1000Mbps
- USB-C: Supports PD 3.0, 100W Max (does not support data/video streaming)
- Compatible Systems: Windows/macOS/Linux



6-in-1 USB-C Multifunction Adapter
PID: CM511 20956A

- Input: 1xUSB-C
- Output: 1x HDMI, 3xUSB-A, 1xSD Card Slot, 1xTF Card Slot
- HDMI: Up to 4K@30Hz
- SD/TF Card Slots: SD 3.0 supports transfer rate of up to 104MB/s
- Supports Tf/SD reading and writing simultaneously
- USB-A: Supports transfer rate of up to 5Gbps
- Compatible Systems: Windows/macOS/Linux



12-in-1 USB-C Multifunction Docking Station Pro

PID: CM555 90325



12-in-1
Unlock More Potential of Your Laptop

- Power Button
- USB A x2: 5Gbps
- DP: 4K@60Hz
- HDMI: 4K@60Hz
- USB A 3.1: 10Gbps
- SD/TF: 104MB/s
- The Host
- HDMI: 8K@30Hz
- USB C PD: 100W
- RJ45: 1000Mbps
- 3.5mm: Audio
- USB C 3.1: 10Gbps

HDMI

8K
HDR

Charging for Phone

5V/3A

Extend Mode ABCD

LAN

1000Mbps

10 Gbps

USB A 3.2 USB C 3.2

9-in-1 USB-C Multifunction Adapter

PID: CM490 90119

- Input: 1 × USB-C
- Output: 2 × HDMI, 3 × USB-A, 1 × RJ45, 1 × TF card slot, 1 × SD card slot
- HDMI: Up to 4K@60Hz
- 2×USB-A: Supports transfer rate of up to 5Gbps
- 1×USB-A: Supports transfer rate of up to 480Mbps
- RJ45: 1000Mbps
- SD/TF Card Slots: SD 3.0 supports transfer rate of up to 104MB/s
- USB-C: Supports PD 3.0, 100W Max (does not support data/video streaming)
- When using two HDMI ports at the same time, the product supports dual 4K@30Hz output (Windows) or dual 4K@60Hz output (macOS).



11-in-1 USB-C Multifunction Adapter

PID: CM681 15965

- Input: 1 × USB-C
- Output: 2 × HDMI, 3 × USB-A, 1 × USB-C, 1 × RJ45, 1 × TF card slot, 1 × SD card slot, 1 × 3.5mm
- HDMI: Up to 4K@60Hz
- 2×USB-A: Supports transfer rate of up to 10Gbps
- 1×USB-C: Supports transfer rate of up to 10Gbps
- 1×USB-A: Supports transfer rate of up to 5Gbps
- RJ45: 1000Mbps
- SD/TF Card Slots: SD 3.0 supports transfer rate of up to 104MB/s
- 3.5mm Output/Input: Available for mics/earphones/speakers
- USB-C: Supports PD 3.0, 100W Max (does not support data/video streaming)
- Compatible Systems: Windows/macOS/Linux



6-in-1 USB-C Multifunction Adapter

PID: CM511 60384

- Input: 1×USB-C
- Output: 1×HDMI, 2×USB-A, 1×USB-C, 1×SD Card Slot, 1×TF Card Slot
- HDMI: Up to 4K@60Hz
- USB-A: Supports transfer rate of up to 5Gbps
- SD/TF Card Slots: SD 3.0 supports transfer rate of up to 104MB/s
- Supports TF/SD reading and writing simultaneously
- USB-C: Supports PD 3.0, 100W Max (does not support data/video streaming)
- Compatible Systems: Windows/macOS



7-in-1 USB-C Multifunction Adapter

PID: CM195 15214


- Input: 1×USB-C
- Output: 1×HDMI, 2×USB-A, 1×USB-C, 1×SD Card Slot, 1×TF Card Slot
- HDMI: Up to 4K@30Hz
- USB-A/USB-C: Supports transfer rate of up to 5Gbps
- SD/TF Card Slots: SD 3.0 supports transfer rate of up to 104MB/s
- USB-C: Supports PD 3.0, 100W Max (does not support data/video streaming)
- Compatible Systems: Windows/macOS/Linux



13-in-1 USB-C Multifunction Adapter

PID: CM681 15978

- Input: 1 × USB-C
- Output: 2 × HDMI, 1 × DP, 4 × USB-A, 1 × USB-C, 1 × RJ45, 1 × TF card slot, 1 × SD card slot, 1 × 3.5mm
- HDMI: Up to 4K@60Hz
- 2×USB-A: Supports transfer rate of up to 10Gbps
- 1×USB-C: Supports transfer rate of up to 10Gbps
- 2×USB-A: Supports transfer rate of up to 5Gbps
- RJ45: Up to 1000Mbps
- SD/TF Card Slots: SD 3.0 supports transfer rate of up to 104MB/s
- 3.5mm Output/Input: Available for mics/earphones/speakers
- USB-C: Supports PD 3.0, 100W Max (does not support data/video streaming)
- Compatible Systems: Windows/macOS/Linux

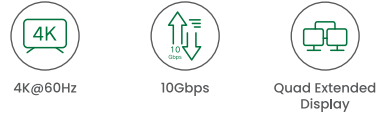

9-in-1 USB-C Multifunction Adapter

PID: CM615 90912

- Input: 1×USB-C
- Output: 2×HDMI, 2×DP, 2×USB-A, 1×USB-C, 1×RJ45
- DP: Up to 4K@60Hz
- HDMI: Up to 4K@60Hz
- USB-A/USB-C: Supports transfer rate of up to 10Gbps
- RJ45: 1000Mbps
- USB-C: Supports PD 3.0, 100W Max (does not support data/video streaming)
- Compatible Systems: Windows/macOS



7-in-1 USB-C Multifunction Adapter

PID: CM498 15531

- Input: 1×USB-C
- Output: 1×HDMI, 2×USB-A, 1×USB-C, 1×SD Card Slot, 1×TF Card Slot
- HDMI: Up to 4K@30Hz
- USB-A/USB-C: Supports transfer rate of up to 10Gbps
- USB-C: Supports PD 3.0, 100W Max (does not support data/video streaming)
- SD/TF Card Slots: SD 3.0 supports transfer rate of up to 104MB/s
- Compatible Systems: Windows/macOS/Linux



9-in-1 USB-C Multifunction Adapter

PID: CM498 15375

- Input: 1×USB-C
- Output: 1×HDMI, 2×USB-A, 2×USB-C, 1×RJ45, 1×SD Card Slot, 1×TF Card Slot
- HDMI: Up to 4K@60Hz
- USB-A/USB-C: Supports transfer rate of up to 5Gbps
- RJ45: Up to 1000Mbps
- SD/TF Card Slots: SD 3.0 supports transfer rate of up to 104MB/s
- Supports TF/SD reading and writing simultaneously
- USB-C: Supports PD 3.0, 100W Max (does not support data/video streaming)
- Compatible Systems: Windows/macOS/Linux



5-in-1 USB-C Multifunction Adapter

PID: CM359 80551

- Input: 1×USB-C
- Output: 1×HDMI, 2×USB-A, 1×SD Card Slot, 1×TF Card Slot
- HDMI: Up to 4K@30Hz
- USB-A: Supports transfer rate of up to 5Gbps
- SD/TF Card Slots: SD 3.0 supports transfer rate of up to 104MB/s
- Compatible Systems: Windows/macOS/Linux



Dual USB-C 5-in-1 Multifunction Converter

Made for MacBook Air/Pro

PID: CM251 60560

- Input: 2×USB-C
- Output: 3×USB-A, 1×USB-C, 1×SD Card Slot, 1×TF Card Slot
- USB-A: Supports transfer rate of up to 5Gbps
- USB-C: Support transfer rate of up to 40Gbps; Supports PD 3.0, 100W Max; Support video streaming, 4K@60Hz
- Compatible Systems: macOS



9-in-1 USB-C Multifunction Adapter

PID: CM498 15600

- Input: 1×USB-C
- Output: 1×HDMI, 1×VGA, 3×USB-A, 1×RJ45, 1×SD Card Slot, 1×TF Card Slot
- HDMI: Up to 4K@30Hz
- VGA: Up to 1080P@60Hz
- USB-A: Supports transfer rate of up to 5Gbps
- RJ45: Up to 1000Mbps
- SD/TF Card Slots: SD 3.0 supports transfer rate of up to 104MB/s
- USB-C: Supports PD 3.0, 100W Max (does not support data/video streaming)
- Compatible Systems: Windows/macOS/Linux



10-in-1 USB-C Multifunction Adapter

PID: CM498 15601

- Input: 1×USB-C
- Output: 1×HDMI, 1×VGA, 3×USB-A, 1×RJ45, 1×SD Card Slot, 1×TF Card Slot, 1×3.5mm Audio
- HDMI: Up to 4K@30Hz
- VGA: Up to 1080P@60Hz
- USB-A: Supports transfer rate of up to 5Gbps
- RJ45: Up to 1000Mbps
- SD/TF Card Slots: SD 3.0 supports transfer rate of up to 104MB/s
- 3.5mm Output: Available for earphones
- USB-C: Supports PD 3.0, 100W Max (does not support data/video streaming)
- Compatible Systems: Windows/macOS/Linux



5-in-1 USB-C Multifunction Adapter

Made for MacBook Air/Pro

PID: CM251 60559

- Input: 2×USB-C
- Output: 1×HDMI, 3×USB-A, 1×USB-C
- HDMI: Up to 4K@30Hz and backward compatible
- USB-A: Supports transfer rate of up to 5Gbps
- USB-C: Support transfer rate of up to 40Gbps; Supports PD 3.0, 100W Max; Support video streaming, 4K@60Hz
- Compatible Systems: macOS



6-in-1 USB-C Multifunction Adapter

Made for MacBook Air/Pro

PID: CM380 80856

- Input: 2×USB-C
- Output: 1×HDMI, 2×USB-A, 1×USB-C, 1×SD Card Slot, 1×TF Card Slot
- HDMI: Up to 4K@30Hz and backward compatible
- USB-A: Supports transfer rate of up to 5Gbps
- SD/TF Card Slots: SD 3.0 supports theoretical transfer rate of up to 104MB/s
- USB-C: Support transfer rate of up to 40Gbps; Supports PD 3.0, 100W Max; Support video streaming, 4K@60Hz
- Compatible Systems: macOS



9-in-1 USB-C Multifunction Adapter

PID: CM498 15602


- Input: 1×USB-C
- Output: 1×HDMI, 1×DP, 1×VGA, 2×USB-A, 1×RJ45, 1×SD Card Slot, 1×TF Card Slot
- HDMI: Up to 4K@60Hz
- DP: Up to 4K@60Hz
- VGA: Up to 1080P@60Hz
- Support HDMI/DP/VGA connection simultaneously
- USB-A: Supports transfer rate of up to 5Gbps
- RJ45: Up to 1000Mbps
- SD/TF Card Slots: SD 3.0 supports transfer rate of up to 104MB/s
- USB-C: Supports PD 3.0, 100W Max (does not support data/video streaming)
- Compatible Systems: Windows/macOS/Linux



6-in-1 USB-C Multifunction Adapter

PID: CM498 15852

- Input: 1×USB-C
- Output: 2×HDMI, 2×USB-A, 1×USB-C
- HDMI 1: Up to 8K@30Hz
- HDMI 2: Up to 4K@60Hz
- VGA: Up to 1080P@60Hz
- USB-A/USB-C: Supports transfer rate of up to 5Gbps
- USB-C: Supports PD 3.0, 100W Max (does not support data/video streaming)
- Compatible Systems: Windows/macOS/Linux

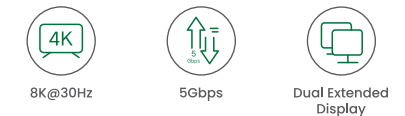

Portable Wireless Mouse

- PID: MU001 90374**
- Mode: Wireless -2.4 GHz
 - Operating Distance: 10 m/32.8ft
 - DPI: 1000/1600/2000/4000 DPI
 - 3cm/1.2inch Ultra Slim
 - Click button: Mute button, the lifespan of 3 million times
 - Scroll: Metal material with silent encoder, 300,000 times lifespan



- Quieter Click
- 4000 DPI
- Long Battery Life

2.4G Wireless Mouse

- PID: MU105 90671**
- Mode: Wireless -2.4 GHz
 - Operating Distance: 10 m/32.8ft
 - DPI: 800/1200/1600/2400 DPI
 - 3 Buttons Function
 - Click button: Mute button, the lifespan of 3 million times
 - Scroll: Metal material with silent encoder, 300,000 times lifespan



- Quieter Click
- 4 Levels DPI Switch
- Long Battery Life

Ergonomic Wireless Mouse

- PID: MU006 90545**
- Mode: Wireless -2.4 GHz
 - Operating Distance: 15 m/49.2ft
 - DPI: 800/1200/1600/2000/4000 DPI
 - 5 Buttons Function
 - Click button: Mute button, the lifespan of 3 million times
 - Scroll: Rubber material with silent encoder, 300,000 times lifespan



- Quieter Click
- 4000 DPI
- Comfortable Grip

Wireless Chocolate Membrane keyboard

- PID: KU004 90250**
- Connection mode: 2.4 GHz
 - Transmission distance: 10 m/32.8ft
 - Product material: ABS
 - Number of keys: 104 keys
 - UV characters, spill-resistant design and built to last
 - Keyboard key lifecycle: 10 million times
 - Key indicator: NUM, CAP, SCR
 - Other functions: Fn shortcut key



- Easy and Comfortable Typing
- Quieter Clicks
- Long Battery Life

Ultra Slim Wireless Keyboard

- PID: KU005 15258**
- Connection Mode: 2.4G/Bluetooth 5.0
 - Operation Distance: 10m
 - Number of keys: 99 keys/100 Keys
 - UV characters, wear-resistant and do not fade
 - Keyboard key lifecycle: 10 million times
 - Key indicator: Num, Caps, Scroll
 - Function keys: 12 Fn Combination keys



- Quieter Clicks
- Convenient Media Hotkeys
- Long Battery Life

Wired Mechanical Keyboard

- PID: KU103 15259**
- Connection Mode: USB Wired
 - Cable Length: 1.8m
 - Number of keys: 108 Keys
 - Keyboard key lifecycle: 50 million times
 - Key indicator: Num, Caps, Scroll
 - Function keys: 4 function keys+12 Fn Combination keys



- Easy and Comfortable Typing
- Quieter Clicks
- 15 Colourful Light Effects

Ergonomic Wireless Mouse

PID: MU103 90539

- Three Ways to Connect
- Gaming Level Sensor
- 5 Levels DPI



Flexible 5-button Control with Silent Click

Quiet Click helps you stay focused while enhancing your all-day productivity.



4-Port USB 3.0 Hub

PID: CR113 40850

- Input Port: 1xUSB-C/USB-A 3.0
- Output Port: 4xUSB-A 3.0
- USB 3.0, Supports theoretical transfer rate of up to 5Gbps
- With USB-C power port, 5V/2A Max



- 5Gbps
- Power Supply
- 2-in-1 Switch to Connect

7-Port USB 3.0 Hub

PID: CM481 90307

- Input Port: 1xUSB-C (data transfer only)
- Output: 7xUSB-A 3.0
- USB 3.0, Supports theoretical transfer rate of up to 5Gbps
- Compliance with BC 1.2 fast charging protocol (only works for the ports with "闪电设计图标")
- Total Output: 5V/3.5A Max



- 5Gbps
- Separate Switches
- BC 1.2 Fast Charging

USB-C to 4-Port USB 3.0 Hub

PID: CM219 70336

- Input Port: 1xUSB-C
- Output Port: 4xUSB-A 3.0
- USB 3.0, Supports theoretical transfer rate of up to 5Gbps
- With USB-C power port, 5V 2A Max



- 5Gbps
- Power Supply
- Multi-system Support

USB 3.0 to Gigabit Ethernet Adapter

PID: CM209 50922

- Connector: USB-A 3.0, RJ45 (1000Mbps)
- USB 3.0, Supports theoretical transfer rate of up to 5Gbps
- Support 10/100/1000Mbps network access
- LED indicators



- 1000Mbps
- Fast & Stable Data Connection
- Premium Aluminum Alloy Shell

USB 3.0 Hub with Gigabit Ethernet Adapter

PID: CM475 60554

- Input Port: 1xUSB-A 3.0
- Output Port: 3xUSB-A 3.0, 1x RJ45, 1x USB-C
- USB 3.0, Supports theoretical transfer rate of up to 5Gbps
- Ethernet Port: 1000Mbps
- Power Supply: USB-C, 5.0V=2.0A Max



- 1000Mbps
- 5Gbps
- Power Supply

USB-C to Gigabit Ethernet Adapter

PID: CM199 50737

- Connector: USB-C, RJ45 (1000Mbps)
- Input: 5.0V=0.9A Max
- USB-C 3.0, Supports theoretical transfer rate of up to 5Gbps
- Support 10/100/1000 Mbps network access
- Aluminum Alloy Housing



- 1000Mbps
- Multi-system Support
- Premium Aluminum Alloy Shell

USB-C to 2.5G Gigabit Ethernet Adapter

PID: CM199

- Connector: USB-C, RJ45 (2500Mbps)
- USB-C 3.0, Supports theoretical transfer rate of up to 5Gbps
- Support 10/100/1000 Mbps/2.5G network access



- 2.5Gbps Ethernet
- Multi-system Support
- Premium Aluminum Alloy Shell

USB-C to USB 3.0 Hub with Ethernet Adapter

PID: CM475 20932

- Input port: 1xUSB-C
- Output port: 3xUSB-A 3.0 + RJ45 Gigabit + USB-C
- USB 3.0, Supports theoretical transfer rate of up to 5Gbps
- Support PD fast charging up to 100W
- Support 10/100/1000Mbps network access



- 1000Mbps
- 5Gbps
- PD 100W

4-Port USB 3.0 Hub

PID: CM219 50985

- USB-C Power Supply Port
- 5Gbps High-speed Transmission
- Overcurrent & Short-circuit Protection

Driver-free Installation with Universal Compatibility

USB A devices	Systems
Card reader	Windows
Keyboard	MAC OS
Printer	
Mouse	iOS
HDD	Linux
USB Camera	
USB Stick	Chrome OS
PS4/PS5/ Xbox	
USB Microfon	

Extra Power Supply Port

The 5V/2A USB-C power supply port ensures stable performance for power-hungry devices.

2-in-1 USB 3.0 SD/TF Card Reader

PID: CR127 20250

- Input Port: 1×USB-A 3.0
- Output Port: 1×SD Card Slot, 1×TF Card Slot
- Memory card transfer speed: ≈100MB/S (theoretically)
- Support Maximum Capacity: 512G measured, theoretical capacity of 2TB
- Support a simultaneous write and read of memory cards



USB 3.0 Card Reader

PID: CM180 50541

- Input Port: 1×USB-A
- Output Port: 1×SD Card Slot, 1×TF Card Slot, 1×CF Card Slot, 1×MS Card Slot
- USB Standard: Supports theoretical transfer rate of up to 5Gbps
- SD/TF Transfer Speed: Supports transfer rate of up to 90MB/s
- CF Transfer Speed: Supports transfer rate of up to 150MB/s
- MS Transfer Speed: Supports transfer rate of up to 15MB/s
- 256G measured, theoretical capacity of 2TB
- Support a simultaneous write and read of memory cards



4-in-1 USB-C Card Reader

PID: CM627 15307


- Input Port: 1×USB-C
- Output Port: 1×SD Card Slot, 1×TF Card Slot, 1×CF Card Slot, 1×MS Card Slot
- USB Standard: Supports theoretical transfer rate of up to 5Gbps
- Memory Card Transfer Speed: Supports transfer rate of up to 90MB/s
- Support Maximum Capacity: Theoretically support 2TB (SD/TF/MS) and 144PB (CF)
- Support a simultaneous write and read of memory cards



2-in-1 USB-C & USB 3.0 SD/TF Card Reader

PID: CM184 50706

- Input Port: 1×USB-A 3.0, 1×USB-C
- Output Port: 1×SD Card Slot, 1×TF Card Slot
- USB Standard: Supports theoretical transfer rate of up to 5Gbps
- Memory card transfer speed: ≈100MB/S (theoretically)
- Support Maximum Capacity: 512G measured, theoretical capacity of 2TB
- Support a simultaneous write and read of memory cards

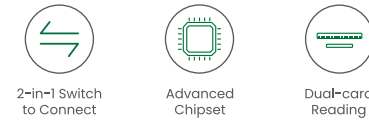

2-in-1 USB-C SD/TF Card Reader

PID: CM401 80888

- Input Port: 1×USB-C
- Output Port: 1×SD Card Slot, 1×TF Card Slot
- USB Standard: Supports theoretical transfer rate of up to 5Gbps
- Memory card transfer speed: ≈100MB/S (theoretically)
- Support memory cards for simultaneous use
- 512G measured, theoretical support 2TB
- Aluminum case



4-in-1 USB-C Card Reader

PID: CM651 15583

- Input Port: USB-C 3.2 Gen2 male
- Output Port: TF/SD 3.0/CFexpress Type A / CFexpress Type B card slot
- TF/SD Memory card transfer speed: ≈100MB/S (theoretically)
- CFexpress Memory Card transfer speed: ≈950MB/S (theoretically)
- 256G measured, theoretical capacity of 2TB (theoretically)
- Support a simultaneous write and read of memory cards



USB-C Multifunction Card Reader

PID: CM265 60724



SuperSpeed Data Transmission

Compatible with SD/TF 4.0 card,
3 times faster than SD/TF 3.0



Read and Write 2 Cards at Once

With supported maximum capacity of up to 512G.



USB-C to HDMI Adapter
PID: CM297 70444

- Input: USB-C male
- Output: HDMI female
- Support 4K@60Hz/2K@120Hz
- HDMI 2.0, support 3D
- Aluminum case



- 4K Ultra HD 4K@60Hz
- Mirror & Extended Mode
- 3D 3D Visual Effect

HD USB Video Capture Card
PID: CM489 40189

- Input: HDMI IN (4K@60Hz Max)
- Capture port: USB-C+A (1080P@30Hz)
- USB-C+A: Supports theoretical transfer rate of up to 480Mbps
- Sampling rate: 24-bit/48 kHz
- SNR: >90dB
- THD: <-80dB



- 1080p Full HD 1080p Video Capture
- Multi-system Support
- Plug and Play

Thunderbolt 4 USB-C Cable
PID: US501 30389

- Input: USB-C male
- Output: USB-C male
- Thunderbolt 4 standard, 40Gbps
- 5A fast charging (PD 100W)
- Support 8K@60Hz high resolution
- Transmit audio and video simultaneously



- 40Gbps
- 8K Ultra HD 8K@60Hz
- PD 100W

USB-C 2.0 to Mini USB Cable
PID: US242 50445

- Input: USB-C male
- Output: Mini USB male
- Supports theoretical transfer rate of up to 480Mbps
- USB-C is compatible with Thunderbolt 3 interface
- Driver-free



- 480Mbps
- Multi-system Support
- Plug and Play

USB-C to DP Cable
PID: MM139 40420

- Input: USB-C male
- Output: DP male
- Support 8K@60Hz
- Support mirror mode and extended mode
- Gold-plated connector



- 8K Ultra HD 8K@60Hz
- Mirror & Extended Mode
- Durable Materials

USB 3.2 Gen 2 Extension Cable
PID: US372 30205

- Input: USB-C 3.2 Gen 2 male
- Output: USB-C 3.2 Gen 2 female
- Supports theoretical transfer rate of up to 10Gbps
- 5A fast charging (PD 100W)
- Transmit audio and video simultaneously
- Built-in Active IC, support 4K@60Hz



- 4K Ultra HD 4K@60Hz
- 10Gbps
- PD 100W

USB-C 3.2 Gen 1 to Micro USB 3.0 Cable
PID: US312 20103

- Input: USB-C 3.2 Gen 1
- Output: USB 3.0 Micro B
- Supports theoretical transfer rate of up to 5Gbps
- Support 4TB hard drive
- 5V/3A fast charge
- Multi-layer shielding inside




- 5Gbps
- Plug and Play
- Stable Transmission

USB-C 2.0 to USB-B 2.0 Printer Cable
PID: US241 50446

- Input: USB-C male
- Output: USB-B 2.0 male
- Speeds up to 480Mbps
- USB-C is compatible with Thunderbolt 3 interface
- Driver-free



- 480Mbps
- Thunderbolt 3 Port
- Plug and Play

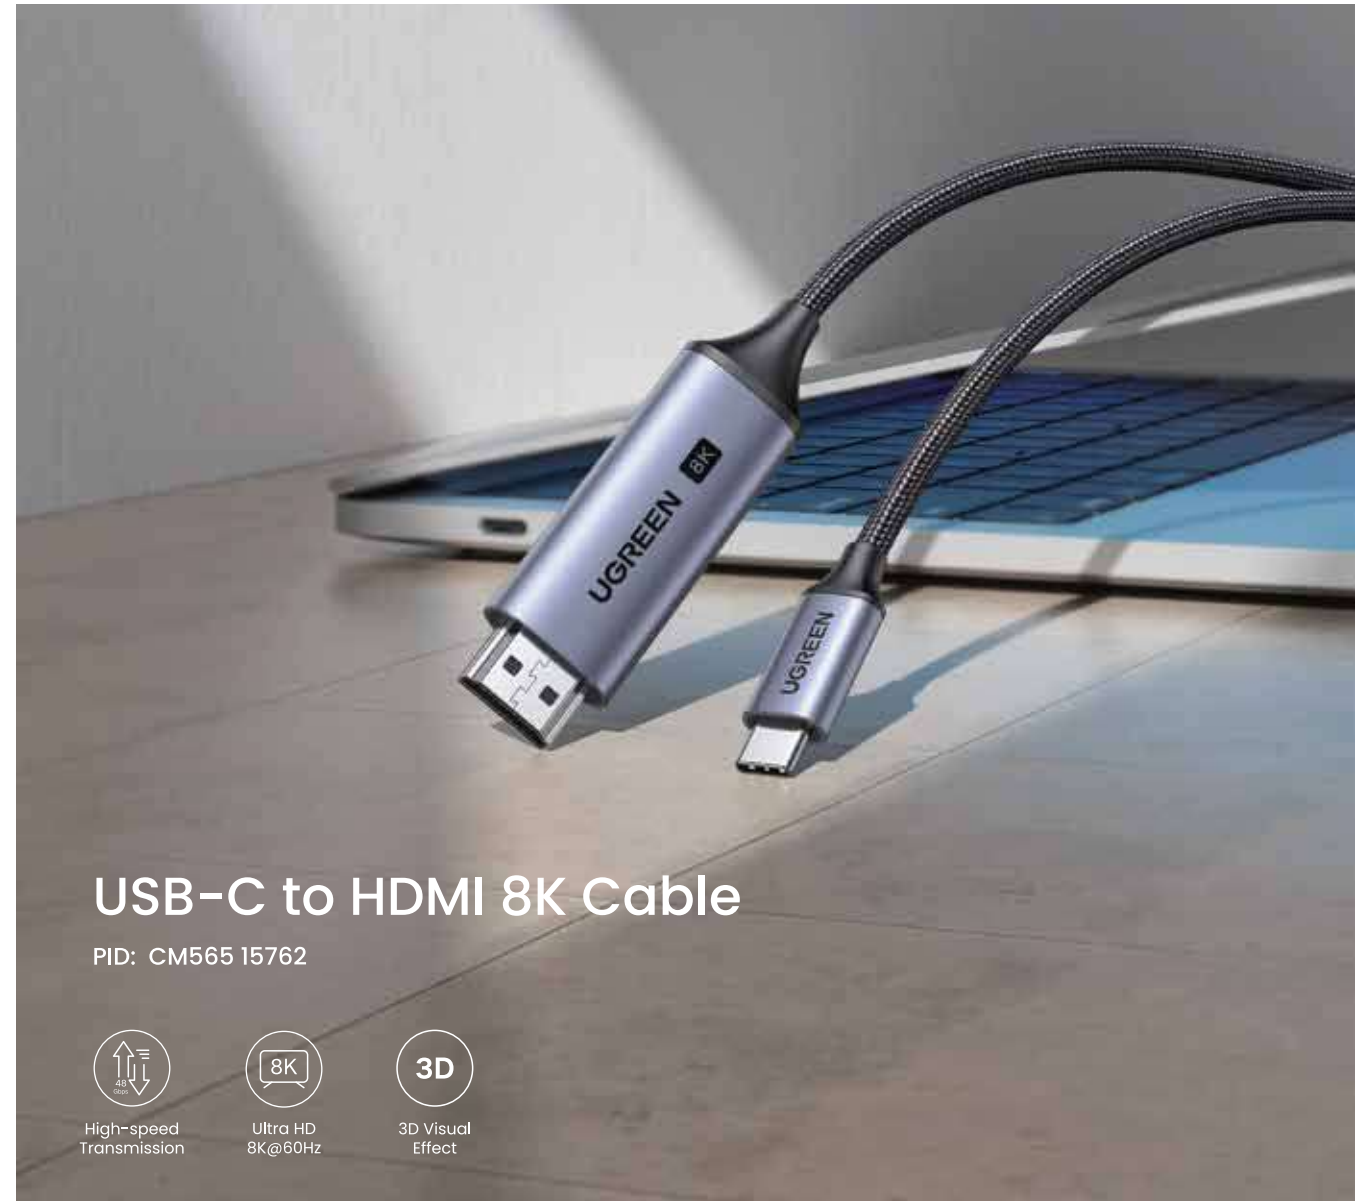

USB-C to HDMI 8K Cable

PID: CM565 15762

- High-speed Transmission
- 8K Ultra HD 8K@60Hz
- 3D 3D Visual Effect

Stable Transmission Without Black Screen

Anti-interference triple-layer shielding effectively reduces signal loss and ensures stable transmission.

- Tinned copper core
- 1st layer of shielding Aluminum foil mylar
- 2nd layer of shielding Aluminum foil
- Ground wire
- Tinned copper braided mesh
- TPE jacket
- Nylon jacket

Display

8K Ultra HD (7680×4320)
8K@60Hz, 4K@240Hz
Dynamic HDR, 3D, 12-Bit color depth

Function

NVIDIA G-Sync
AMD FreeSync
Tear resistance

Durable Alloy Connector with Braided Wire

USB 3.0 to USB-C Adapter

PID: US276 50533


- Input: USB-A 3.0 male
- Output: USB-C 3.2 Gen 1 female
- Supports theoretical transfer rate of up to 5Gbps
- Support 3A current (for mobile charge)
- Aluminum alloy case



USB 3.0 to HDMI & VGA Adapter

PID: CM449 20518

- Input: USB-A 3.0
- Output: HDMI & VGA
- HDMI: 1080P@60Hz
- VGA: 1080P@60Hz
- Supports theoretical transfer rate of up to 5Gbps
- Supported dual mirrored screen display

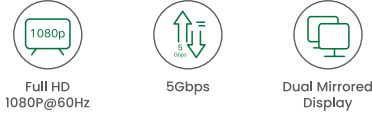

6-in-1 USB-C Multifunction Adapter

PID: CM511 60384

- Input: USB-A male
- Output: Mini USB male
- Supports theoretical transfer rate of up to 480Mbps
- Eco-friendly
- 3m with magnetic loop



USB-A 2.0 Male to USB-A 2.0 Female Extension Cable

PID: US103 10314

- Input: USB-A male
- Output: USB-A female
- Supports theoretical transfer rate of up to 480Mbps
- Multi-layer shielding design
- Eco-friendly



USB 2.0 Sharing Switch 2 In 4 Out

PID: US216 30767

- Input: 2 × USB-A female for PC
- Output: 4 × USB-A female for USB peripheral devices
- Supports data transfer rates of up to 480Mbps
- Share up to 4 USB devices between 2 PCs



USB 3.0 Sharing Switch 2 In 4 Out

PID: US216 30768

- Input: 2 × USB-A female for PC
- Output: 4 × USB-A female for USB peripheral devices
- Supports data transfer rates of up to 5Gbps
- Share up to 4 USB devices between 2 PCs



USB-A 2.0 to USB-A 2.0 Cable

PID: US102 10309

- Input: USB-A male
- Output: USB-A male
- Supports theoretical transfer rate of up to 480Mbps
- Multi-layer shielding design
- Eco-friendly



USB-A to USB-B 2.0 Printer Cable

PID: US369 80801

- Input: USB-A male
- Output: USB-B male
- Supports theoretical transfer rate of up to 480Mbps
- 3m with single magnetic loop
- 5m with double magnetic loop



AC650 11ac Dual-Band Wireless USB Adapter

PID: CM448 20204

- Input: 1 × USB-A 2.0
- LED indicator: 1 × LED indicator
- Wi-Fi: PIFA Antenna (ITIR)
- Transmission rates: 2.4GHz: 200Mbps; 5GHz: 433Mbps
- Operating frequencies: 2.4GHz & 5GHz
- Wireless standards: IEEE 802.11 b/g/n, IEEE 802.11 a/ac



AC650 High-Gain Dual Band Wireless USB Adapter

PID: CM496 90339

- Input: 1 × USB-A 2.0
- LED indicator: 1 × LED indicator
- Wi-Fi: PIFA Antenna (ITIR)
- Transmission rates: 2.4GHz: 200Mbps; 5GHz: 433Mbps
- Operating frequencies: 2.4GHz & 5GHz
- Wireless standards: IEEE 802.11 b/g/n, IEEE 802.11 a/ac



USB-A 3.0 Male to USB-A 3.0 Female Extension Cable

PID: US115 10495

- Input: USB-A male
- Output: USB-A female
- Supports theoretical transfer rate of up to 5Gbps
- Multi-layer shielding inside



USB-A 3.0 to USB-A 3.0 Cable

PID: US128 10370

- Supports theoretical transfer rate of up to 5Gbps
- Support 2A current
- Gold-plated connector
- Multi-layer shielding design



AC1300 Dual-Band Wireless Adapter

PID: CM492 50340

- Input: 1 × USB-A 3.0
- LED indicator: 1 × LED indicator
- Wi-Fi: 2 × Internal PIFA antenna
- Transmission rates: 400Mbps (2.4GHz) 900Mbps (5GHz)
- Operating frequencies: 2.4GHz & 5GHz
- Wireless standards: IEEE 802.11b/g/n (2.4GHz) IEEE 802.11a/ac (5GHz)



AX1800 Dual-Band Wireless Adapter (Wi-Fi 6)

PID: CM499 90340

- Input: 1 × USB-A 3.0
- LED indicator: 1 × LED indicator
- Wi-Fi: 2 × Internal high-gain antenna
- Transmission rates: 574Mbps Max (2.4GHz) 1201Mbps Max (5GHz)
- Operating frequencies: 2.4GHz & 5GHz
- Wireless standards: IEEE 802.11b/g/n/ax (2.4GHz) IEEE 802.11a/ac/ax (5GHz)



USB-A 3.0 to Micro USB 3.0 Cable

PID: US130 10840

- Input: USB-A 3.0 male
- Output: USB 3.0 Micro B male
- Function: charging & data sync
- Support 4TB hard drive
- Supports theoretical transfer rate of up to 5Gbps
- Multi-layer shielding design



USB-A 3.0 to USB-B 3.0 Printer Cable

PID: US210 10372

- Input: USB-A 3.0 male
- Output: USB-B 3.0 male
- Support print devices, hard drives, Blu-ray devices, webcams, cameras, etc.
- Support 4TB hard drive
- Supports theoretical transfer rate of up to 5Gbps
- Support 2A current



4K HDMI Cable
PID: HD118 40408

- HDMI 2.0
- 1m-3m supports 4K@60Hz
- 5m-15m supports 4K@30Hz
- 20m-30m supports 4K@30Hz
- Gold-plated connector
- Multi-layer shielding inside



- 4K Ultra HD 4K@60Hz
- 3D 3D Visual Effect
- HDR HDR

8K Micro HDMI to HDMI Cable
PID: HD164 15516

- HDMI 2.1
- Support 3D
- 1m-2m supports 8K@60Hz
- Multi-layer shielding inside



- 8K Ultra HD 8K@60Hz
- 3D 3D Visual Effect
- HDR HDR

8K Mini HDMI to HDMI Cable
PID: HD163 15514

- HDMI 2.1
- Support 3D
- 1m-2m supports 8K@60Hz
- Multi-layer shielding inside



- 8K Ultra HD 8K@60Hz
- 3D 3D Visual Effect
- HDR HDR

8K HDMI Male To Female Extension Cable
PID: HD165 15518

- HDMI 2.1
- Support 8K@60Hz
- It supports the connection of 28Awg 3m long HDMI 2.1 male to male wire



- 8K Ultra HD 8K@60Hz
- 3D 3D Visual Effect
- HDR HDR

HDMI to DVI (24+1) Round Cable
PID: HD106 11150

- Input: HDMI male
- Output: DVI (24+1) male
- Two-way switch
- 1m-5m: 30AWG OD 7.3mm
- 1m-5m: 1080P@60Hz



- 1080p Full HD 1080P@60Hz
- Multi-screen Splicing & Mirror Mode
- Bi-directional Data Transfer

HDMI to VGA Adapter
PID: MM103 40248

- Input: 1 × HDMI
- Output: 1 × VGA, 1 × 3.5mm Audio
- Resolution: Up to 1080p@60Hz
- Power Supply: Micro USB



- 1080p Full HD 1080P@60Hz
- Audio and Video Sync
- Mirror & Extended Mode

HDMI to HDMI & VGA Adapter
PID: CM101 40744

- Input: 1 × HDMI Male
- Output: 1 × HDMI, 1 × VGA, 1 × 3.5mm Audio
- Resolution: HDMI: Up to 4K@30Hz
VGA: Up to 1080p@60Hz
- Power Supply: Micro USB
- HDMI and VGA ports cannot be used simultaneously.



- 4K 4K@30Hz HDMI
- 3D 3D Visual Effects
- Audio and Video Sync

HDMI to DisplayPort Adapter
PID: MM107 40238

- Input: 1 × HDMI male
- Output: 1 × DisplayPort female
- Resolution: Up to 4K@30Hz
- Power Supply: USB-A



- 4K 4K@30Hz Ultra HD
- 3D 3D Visual Effects
- HDR HDR



8K HDMI Cable

PID: HD135 70319

- High-speed Transmission
- 8K Ultra HD 8K@60Hz
- 3D 3D Visual Effect

1 Ultra Durability
1000+ bend lifespan for everlasting durability

2 Premium Zinc Alloy Case
Prevents scratches and rust, more durable

3 High Quality Nickel Plated Connector
for optimal signal transference

Multi-layer Shielding for Stable Transmission

- Tinned Copper
- Cotton Yarn
- Aluminum Foil Shielding
- Braid
- PE Insulation
- Nylon Braid

4K DisplayPort Cable
PID: DP102 10245

- Support 3D
- 28AWG tin-plated copper
- Multi-layer shielding inside
- 1m-5m support 4K@60Hz



- 4K** Ultra HD 4K@60Hz
- 3D** 3D Visual Effect
- Multi-screen Splicing & Mirror Mode**

DisplayPort to VGA Adapter
PID: DP109 20415

- Input: 1 × DP male
- Output: 1 × VGA female
- Resolution: Up to 1080p@60Hz
- Internal multi-layer shielding



- 1080p@60Hz Full HD**
- Plug & Play**
- Mirror & Extended Mode**

8K DisplayPort to HDMI Cable
PID: DP115 80396

- Support 8K@60Hz
- 32AWG tin-plated copper
- Multi-layer shielding inside
- Audio sampling rate: 192khz/24bit Max



- 8K** Ultra HD 8K@60Hz
- 3D** 3D Visual Effect
- HDR**

DisplayPort to HDMI Adapter
PID: MM137 40948

- Input: 1 × DisplayPort Male
- Output: 1 × HDMI Female
- Power Supply: USB-C
- Resolution: Up to 8K@60Hz



- 8K** 8K@60Hz Ultra HD
- 3D** 3D Visual Effect
- HDR**

DisplayPort Bi-directional Switch
PID: CM430 60622

- Input: 2 × DisplayPort/1 × DisplayPort
- Output: 1 × DisplayPort/2 × DisplayPort
- Power Supply: USB-C
- Resolution: Up to 4K@60Hz



- Bi-directional Switching**
- 3D** 3D Visual Effects
- 4K** 4K@60Hz Ultra HD

8K Mini DisplayPort to DisplayPort Cable
PID: DP117 80663

- Support resolutions up to 8K
- 32AWG tin-plated copper
- Bi-directional transfer
- Multi-layer shielding inside



- 8K** Ultra HD 8K@60Hz
- 3D** 3D Visual Effect
- HDR**

Mini DisplayPort to HDMI Adapter
PID: MD112 40360

- Input: 1 × Mini DisplayPort
- Output: 1 × HDMI
- Resolution: Up to 4K@30Hz
- Cable Core: Tin-plated copper
- Internal multi-layer shielding



- 4K** 4K@30Hz HDMI
- 3D** 3D Visual Effects
- HDR**

Mini DisplayPort to VGA & HDMI Adapter
PID: MD115 20421

- Input: 1 × Mini DisplayPort
- Output: 1 × HDMI, 1 × VGA
- Aluminum case
- Resolution: HDMI: Up to 4K@30Hz
VGA: Up to 1080p@60Hz
- HDMI and VGA ports cannot be used simultaneously.



- 4K** 4K@30Hz Ultra HD
- 3D** 3D Visual Effects
- HDR**



8K DisplayPort Cable

PID: DP112 60842


- High-speed Transmission**
- 8K** Ultra HD 8K@60Hz Video Streaming
- 3D** 3D Visual Effect
- HDR** For More Realistic Displays

TOP-NOTCH DISPLAYPORT 1.4 CABLE

Compliant with VESA, stronger performance

	DP 1.4	DP 1.2
Bandwidth	32.4Gbps	21.6Gbps
Refresh rate	8K@60HZ 4K@144HZ 2K@165HZ	4K@60HZ 2K@144HZ
Sound transmission	32Bit	8Bit
Dynamic HDR	Yes	No
Multi-screen display	Yes	No

MULTI-LAYER SHIELDING RESISTS EMI

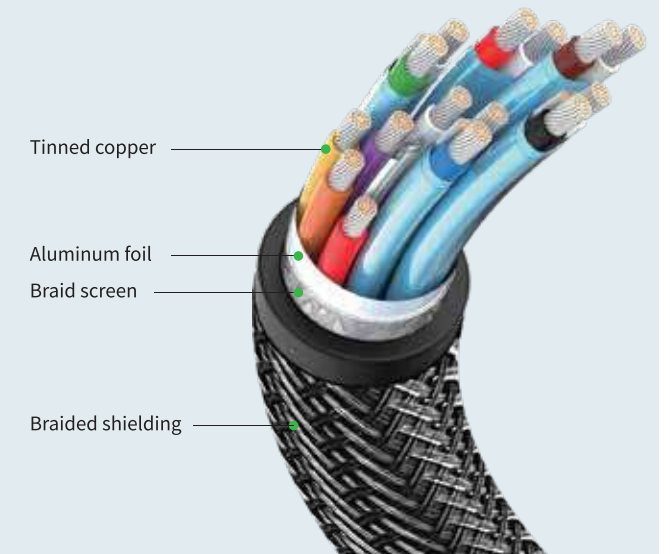

VGA to HDMI Adapter

- PID: CM269 60814**
- Input: 1 × VGA male, 1 × 3.5mm Audio
 - Output: 1 × HDMI female
 - Resolution: Up to 1080p@60Hz
 - Power Supply: Micro USB
 - EDID is unavailable



- 1080P@60Hz Full HD
- Plug and Play
- Audio and Video Sync

VGA KVM Switch 2 In 1 Out

- PID: 30357**
- Input: 2 × VGA, 2 × USB-B 2.0 female
 - Output: 1 × VGA, 2 × USB-A 2.0 female
 - Resolution: Up to 1080p@60Hz
 - Share one display device between two hosts
 - Switch easily with the push of a button



- 1080P@60Hz Full HD
- Plug and Play
- One-click Switching

VGA KVM Switch 4 In 1 Out

- PID: CM154 50280**
- Input: 4 × VGA, 4 × USB-B 2.0 female
 - Output: 1 × VGA, 3 × USB-A 2.0 female
 - Resolution: Up to 1920 × 1440 1080p@60Hz
 - Share one display device between four hosts
 - Switch easily with the push of the buttons



- 1080P@60Hz Full HD
- Plug and Play
- One-click Switching

VGA Splitter 1 In 2 Out

- PID: 20918**
- Input: 1 × VGA
 - Output: 2 × VGA
 - Output port 1 supports DDC function
 - Power Supply: Micro USB
 - Resolution: Up to 1080p@60Hz



- 1080P@60Hz Full HD
- Displays the Same Image on 2 Screens
- DDC Automatic Recognition

DVI (24+1) Male to Male Cable

- PID: DV101 11606**
- Multi-layer shielding protection
 - Ferrite core anti-interference
 - Length ≤3m, support 2K@60Hz
 - Length >3m, support 1080P@60Hz
 - Gold-plated connector
 - Core: Tin-plated oxygen-free copper




- QHD 2K@60Hz
- Bi-directional Data Transfer
- Protect Against EMI Interference

DVI-D to VGA Adapter

- PID: MM108 40259**
- Input: 1 × DVI-D (24+1) male
 - Output: 1 × VGA female
 - Resolution: Up to 1080p@60Hz




- 1080P@60Hz Full HD
- HD Visual Effects
- Mirror & Extended Mode

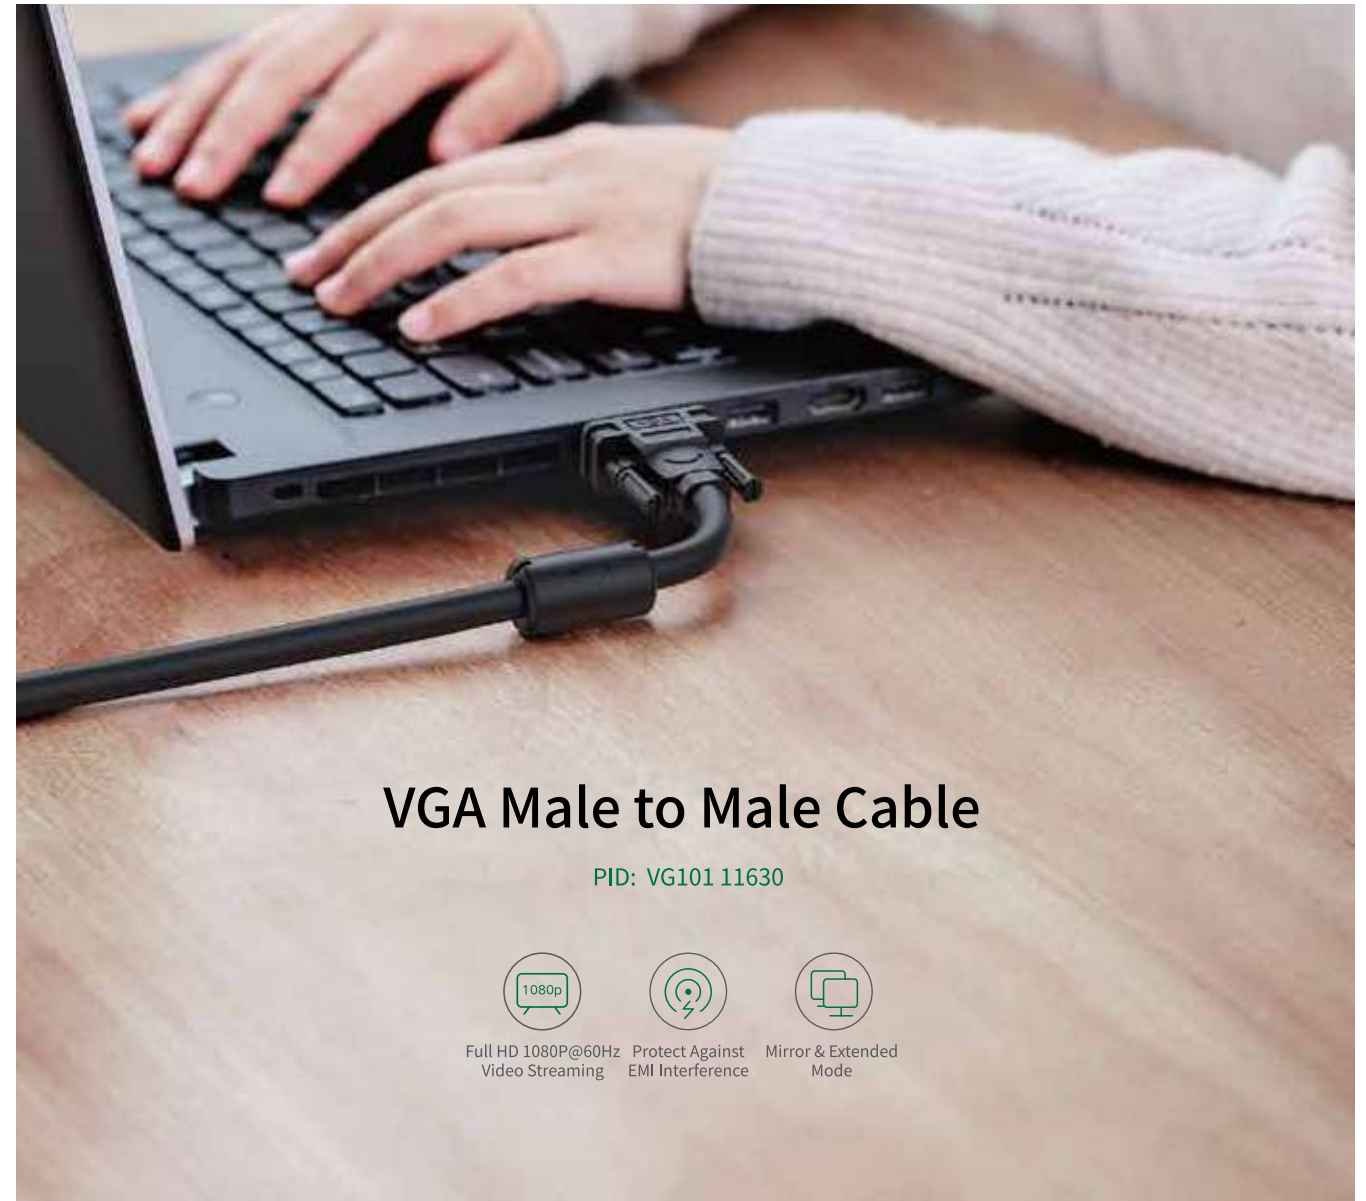

VGA Male to Male Cable

PID: VG101 11630

- Full HD 1080P@60Hz Video Streaming
- Protect Against EMI Interference
- Mirror & Extended Mode

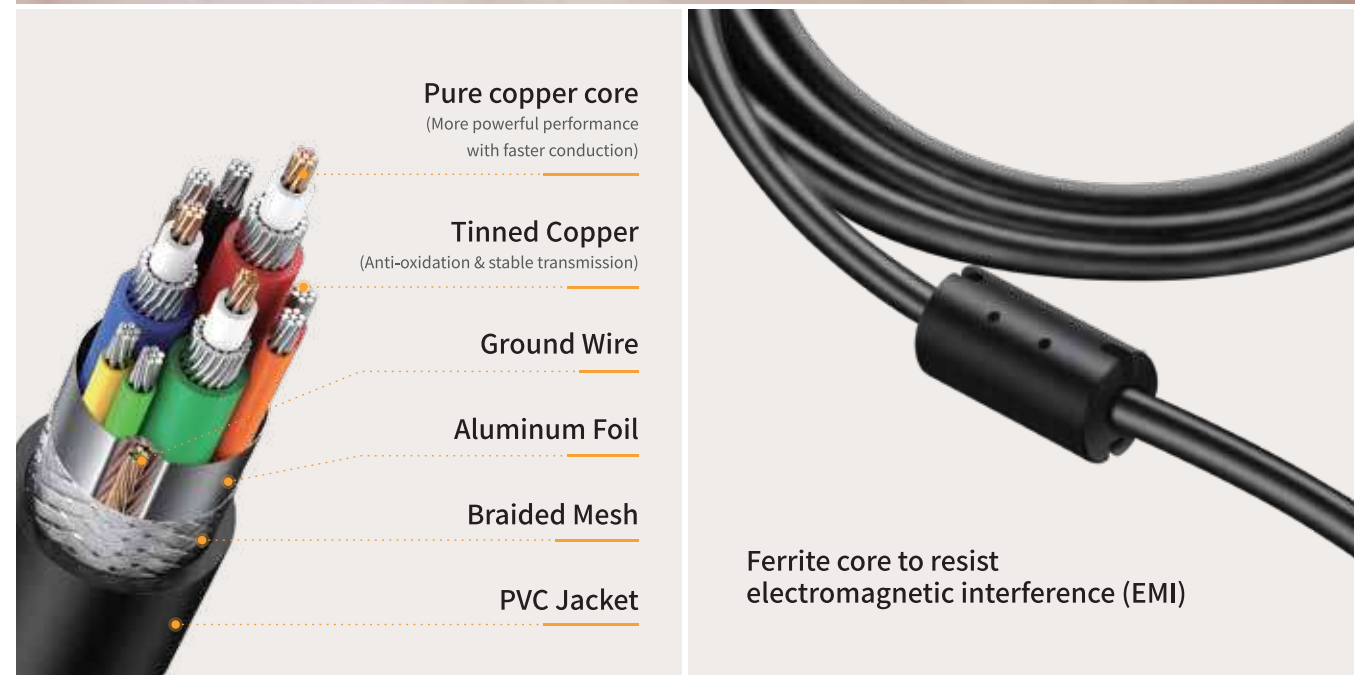

Pure copper core
(More powerful performance with faster conduction)

Tinned Copper
(Anti-oxidation & stable transmission)

Ground Wire

Aluminum Foil

Braided Mesh

PVC Jacket

Ferrite core to resist electromagnetic interference (EMI)

HDMI Bi-directional Switch

PID: CM561 90385

- Input: 2 × HDMI
- Output: 1 × HDMI
- Support HDMI 2.1
- Resolution: Up to 8K@60Hz
- Power Supply: USB-C



- 8K@60Hz Ultra HD
- 3D Visual Effect
- HDR

HDMI KVM Multifunction Switch 2 In 1 Out

PID: CM315 80187

- Input: 2 × HDMI, 2 × USB 2.0-B
- Output: 1 × HDMI, 2 × USB2.0-A
- Resolution: Up to 4K@30Hz



- 4K@30Hz Ultra HD
- Split Screen Function
- Audio and Video Sync

HDMI 2.0 Switch 3 In 1 Out

PID: CM188 50709

- Input: 3 × HDMI
- Output: 1 × HDMI
- Supports HDMI 2.0
- Resolution: Up to 4K@60Hz
- HDCP Version: HDCP 2.2 and backward compatible



- 4K@60Hz Ultra HD
- 3D Visual Effect
- Audio and Video Sync

HDMI KVM Switch 4 In 1 Out

PID: CM293 70439

- Input: 4 × HDMI, 4 × USB-B 2.0
- Output: 1 × HDMI, 2 × USB-A 2.0, 2 × USB-A 1.1
- Resolution: Up to 4K@60Hz
- Switching Modes: Button/Hotkey



- 4K@60Hz Ultra HD
- 3D Visual Effect
- 2 Switching Modes

HDMI Switch 5 In 1 Out

PID: CM568 90512

- Input: 5 × HDMI
- Output: 1 × HDMI
- HDMI 2.0
- Resolution: Up to 4K@60Hz



- 4K@60Hz Ultra HD
- 3D Visual Effects
- Plug and Play

HDMI KVM Switch 8 In 1 Out

PID: CM546 80963

- Input: 8 × HDMI, 8 × USB-B, 1 × IR RX
- Output: 1 × HDMI, 2 × USB 2.0, 2 × USB 1.1
- Switching Modes: Button/Hotkey/Remote Control
- Resolution: Up to 4K@60Hz



- 4K@60Hz Ultra HD
- 3D Visual Effect
- 3 Switching Modes

HDMI 2.0 Splitter 1 In 2 Out

PID: CM186 50707

- Input: 1 × HDMI
- Output: 2 × HDMI
- HDMI 2.0
- Resolution: Up to 4K@60Hz



- 4K@60Hz HDMI
- 3D Visual Effects
- Plug and Play

HDMI 2.0 Splitter 1 In 4 Out

PID: CM570 90514

- Input: 1 × HDMI
- Output: 4 × HDMI
- HDMI 2.0
- Resolution: Up to 4K@60Hz



- 4K@60Hz Ultra HD
- 3D Visual Effects
- Plug and Play



HDMI Bi-directional Switch

PID: CM217 50966

- 4K@30Hz Ultra HD
- 3D Visual Effects
- HDR



HDMI Switch 2 in 1 Out

Seamlessly switch between TV and gaming console




HDMI Splitter 1 in 2 Out

Note: Only one monitor can be displayed at a time


Cat5e UTP Ethernet Cable

- PID: NW103 11231
- UTP
 - Core: 26AWG copper clad aluminum
 - OD: 5.5mm
 - Ethernet speed: 100Mbps
 - Bandwidth: 125MHz
 - Stranding method: 8-core twisted pair

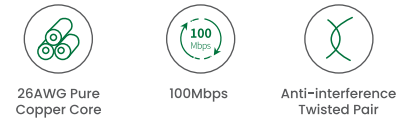



Cat6 UTP Ethernet Cable

- PID: NW102 11201
- UTP
 - Core: 26AWG copper clad aluminum
 - OD: 6mm
 - Gold-plated pure copper connector
 - Ethernet speed: 1000Mbps
 - Bandwidth: 250MHz
 - Stranding method: 8-core twisted pair

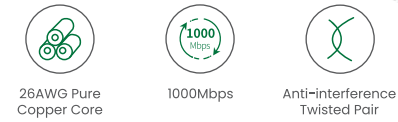

Cat6 UTP Flat Ethernet Cable

- PID: NW101 50184
- UTP
 - Core: 32AWG pure copper
 - Ethernet speed: 1000Mbps
 - Bandwidth: 250MHz
 - Stranding method: 8-core twisted pair

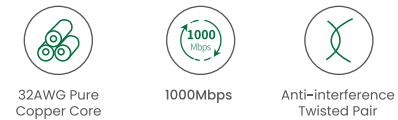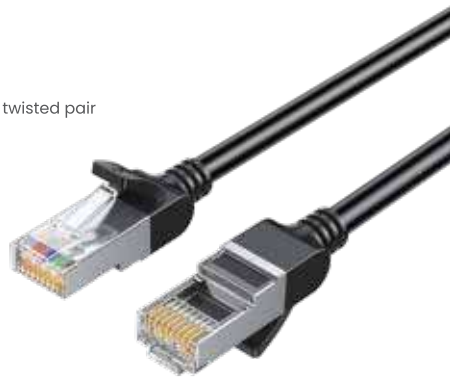

Cat6A UTP Ultra Slim Ethernet Cable

- PID: NW122 70332
- U/UTP
 - Core: 32AWG pure copper
 - OD: 2.8mm
 - Transmission rate: 10Gbps
 - Bandwidth: 500MHz
 - Stranding method: 8-core twisted pairs




Cat7 F/FTP Ultra Slim Ethernet Cable

- PID: NW149 80417
- F/FTP
 - Type: Cat7
 - Core: 34AWG pure copper
 - OD: 4.0mm
 - Transmission rate: 10Gbps
 - Bandwidth: 600MHz
 - Stranding method: 8-core twisted pairs




Cat8 Class I U/FTP Round Ethernet Cable

- PID: NW134 10980
- U/FTP
 - Core: 30AWG Pure copper
 - OD: 2.4*7.4mm
 - Transmission rate: 40Gbps
 - Bandwidth: 2000MHz
 - Stranding method: 8-core twisted pairs

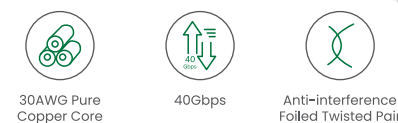

Cat8 Class I S/FTP Round Ethernet Cable

PID: NW153 80429

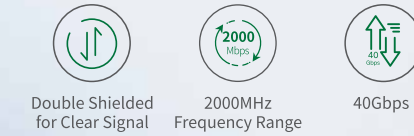


SUPER PERFORMANCE

Multi-protection provides less signal losses and higher speed transmission

8P8C GOLD PLATED CONTACTS

More stable, more durable

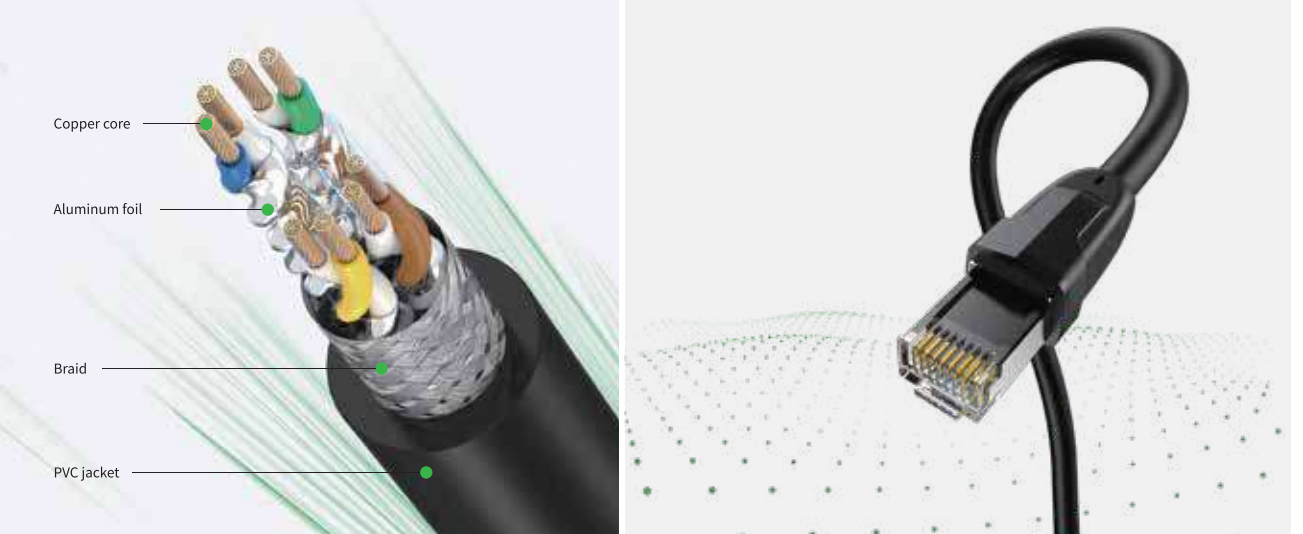

M.2 SATA Hard Drive Enclosure (5Gbps)
PID: CM400 10903

- Input: USB-C female
- Output: M.2 B-Key/M+B Key
- USB Standard: Supports theoretical transfer rate of up to 5Gbps
- Built-in ESD protection circuit
- Supported drive size: 2230, 2242, 2260, 2280



- Fits SATA/NVMe SSDs
- Multiple Heat Dissipation Design
- 5Gbps

M.2 NVMe Hard Drive Enclosure (10Gbps)
PID: CM400 10902

- Input: USB-C female
- Output: M.2 M-Key/M+B Key
- USB Standard: Supports theoretical transfer rate of up to 10Gbps
- Built-in ESD protection circuit
- Supported drive size: 2230, 2242, 2260, 2280



- 10Gbps
- Tool-free Installation
- Premium Aluminum Alloy Housing

2.5-inch SATA Hard Drive Enclosure
PID: CM237 60353

- Input: Micro USB 3.0 female
- Output: SATA (7+15) Pin
- Built-in ESD protection circuit
- Compliance with UASP
- USB Standard: Supports theoretical transfer rate of up to 5Gbps



- 5Gbps
- Tool-free Installation
- Support UASP

3.5-inch SATA External Hard Drive Enclosure
PID: US222 50422

- Input: USB 3.0 Type-B female
- Output: SATA (7+15) Pin
- USB Standard: Supports theoretical transfer rate of up to 5Gbps
- SATA Port: SATA III (6Gbps), and backward compatible with SATA II(3Gbps)/SATA I (1.5Gbps)



- 5Gbps High-speed Transmission
- Tool-free Installation
- Support UASP

USB 3.0 to SATA Hard Drive Adapter
PID: CM321 70609


- Input: USB-A 3.0 male
- Output: SATA (7+15) Pin
- SATA Port: SATA III (6Gbps), and backward compatible with SATA II(3Gbps)/SATA I (1.5Gbps)
- USB Standard: Supports theoretical transfer rate of up to 5Gbps
- Compatible with 2.5" HDD, SSD



- 5Gbps
- Plug and Play
- Support UASP

SATA 3.0 Data Cable
PID: US217 30797

- Straight to angled
- SATA Port: SATA III (6Gbps), and backward compatible with SATA II(3Gbps)/SATA I (1.5Gbps)
- Fasteners on heads
- Flame-retardant material

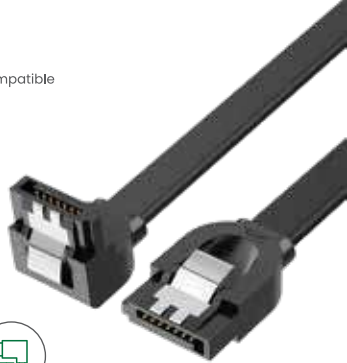

- 5Gbps
- Plug and Play
- Easy Installation

M.2 NVMe to PCI-E 3.0 X4 Expansion Card
PID: CM302 70503

- Input: M.2 M-Key
- Output: PCI-E 3.0X4
- Data Transfer: up to 32Gbps
- Compatible Slots: PCI-E X4/X8/X16
- SSD Specifications: 2230/2242/2260/2280 M.2 NVME SSD



- 32Gbps
- Slim Brackets Avoids Overheating
- Windows/Linux Support

PCIe Gen 4 x16 to M.2 Expansion Card
PID: CM465 30715

- Input: M.2 M-Key
- Output: PCI-E 4.0X16
- Data Transfer: up to 64Gbps
- Compatible Slots: PCI-E X4/X8/X16
- SSD Specifications: 2230/2242/2260/2280 M.2 NVME SSD



- 64Gbps
- Multiple Heat Dissipation Design
- Multi-system Support



M.2 SATA/NVMe Hard Drive Enclosure
PID: CM559 90408

- Fits SATA/NVMe SSDs
- Multiple Heat Dissipation Design
- 10Gbps

Compatible with PCIe NVMe & SATA


Supports M.2 M/B-Key M.2 (M&B) Key



SSD Size 2230/2242/2260/2280

Consistent, Stable Transfer

Improved aluminum and heat sink design enhance heat dissipation for stable high-speed transfers

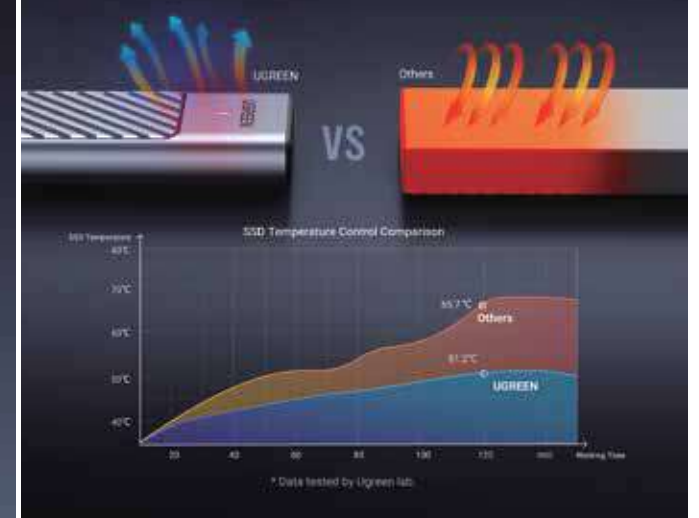

3.5mm Male to Male Round Cable
PID: AV112 10685

- Enamelled copper core
- Gold-plated connector
- Blue aluminum shell + Braid



- Hi-Fi Sound
- Gold-plated Connector
- Ultra-durable Braided Wire

Dual 3.5mm Male to 3.5mm Female Audio Cable
PID: AV140 20899

- Input 1: 3.5mm male for mic
- Input 2: 3.5mm male for headset
- Output: 3.5mm female
- Enamelled copper core
- Eco-friendly & elastic TPE



- Supports Listening & Speaking
- Gold-plated Connector
- Ultra-durable Braided Wire

3.5mm Male to Female Extension Audio Cable
PID: AV118 40673

- Support Mic
- Gold-plated connector
- Enamelled copper core
- Threaded aluminum case + braid



- Mics & Line Control
- Gold-plated Connector
- Ultra-durable Braided Wire

3.5mm Male to 6.35mm Male Cable
PID: AV127 10625

- Pure copper core
- Gold-plated connector
- Multi-layer shielding inside
- Hi-Fi stereo sound quality
- Zinc alloy case + braid



- Hi-Fi Sound
- Gold-plated Connector
- Ultra-durable Braided Wire

6.35mm Male to 6.35mm Male Cable
PID: AV128 10636

- Pure copper core
- Gold-plated connector
- Internal shielding
- Zinc alloy case + braid



- Hi-Fi Sound
- Gold-plated Connector
- Ultra-durable Braided Wire

3.5mm Male to Dual 6.35mm Male Cable
PID: AV126 10613

- Pure copper core
- Gold-plated connector
- Multi-layer shielding in internal
- Hi-Fi stereo sound quality
- Zinc alloy case + braid



- Hi-Fi Sound
- Gold-plated Connector
- Ultra-durable Braided Wire

3.5mm Male to 2 RCA Male Cable
PID: AV170 80845

- 18AWG enamelled copper core
- Internal shielding design
- Gold-plated connector
- Copper alloy shell



- Superb Sound Quality
- Gold-plated Connector
- Anti-interference Internal Shields

XLR Male to XLR Female Cable
PID: AV130 20708

- High fidelity
- Full copper wire core
- Gold-plated connector
- Environmentally friendly Jacket



- Hi-Fi Sound
- Gold-plated Connector
- Durable & Eco-friendly Jacket



Toslink Digital Optical Audio Cable

PID: AV108 70894

- Protect Against EMI/RFI Interference
- Transmits Hi-Fi Sound
- Fits Tightly

ADVANCED FEATURES

Stable signal, free from electromagnetic and noise interference.

DURABLE STRUCTURE

Gold-plated Connectors

Nylon Braided Cable

Rubber Protective Cap

Optical pulse transmission

Bluetooth 5.3 Receiver Audio Adapter

PID: CM123 30445

- Bluetooth Version: 5.3
- Output: female R/L audio and 3.5mm plug
- Bluetooth protocols: AVRCP/A2DP
- Transmit range: up to 10m/33ft
- Battery capacity: 3.7V/200mAh



- RCA
- Pairing 2 Devices Simultaneously
- 10m Broad Operation Range

Bluetooth 5.2 Audio Transmitter

PID: CM107 40761

- Bluetooth Version: 5.2
- Input: 3.5mm plug
- aptX certified
- Bluetooth protocol: A2DP
- Connection: point-to-point connection



- Pairing 2 Devices Simultaneously
- aptX Lossless Audio
- 10m Broad Operation Range

Bluetooth 5.0 Audio Transmitter

PID: CM150 50213

- Bluetooth Version: V5.0
- Input: fiber optic plug
- aptX certified
- Bluetooth protocol: A2DP
- Connection: point-to-point connections



- Pairing 2 Devices Simultaneously
- aptX Lossless Audio
- 10m Broad Operation Range

Bluetooth Audio Receiver/Transmitter

PID: CM403 80893

- Bluetooth Version: V5.0
- Input: 3.5mm plug
- aptX certified
- Battery capacity: 3.7V/140mAh
- Connection: point-to-point connection



- Pairing 2 Devices Simultaneously
- aptX Lossless Audio
- 2-in-1 Bluetooth transceiver

Bluetooth 5.0 Receiver/Transmitter

PID: CM144 70158

- Bluetooth Version: V5.0
- Input: 3.5mm plug and fiber optic jack
- aptX certified
- Battery capacity: 3.7V/300mAh
- Connection: point to point connection



- Pairing 2 Devices Simultaneously
- aptX Lossless Audio
- 2-in-1 Bluetooth transceiver

USB External Stereo Sound Adapter

PID: CM477 30757

- Input: USB-A male
- Output: 3.5mm Audio (mic & headset)
- SNR: 94dB
- Frequency response: 20Hz~20KHz
- Sampling rate: 96KHz/24 bit, 192KHz/16bit



- Superb Stereo Sound Quality
- Plug and Play
- Supports Listening & Speaking

USB 2.0 External Stereo Sound Adapter

PID: US205 30724

- Input: USB-A male
- Output: 3.5mm Audio (Mic & headset)
- Green port for earphone
- Red port for microphone
- Sampling rate: 24-bit/96 kHz, 16-bit/192 kHz



- Superb Stereo Sound Quality
- No Drivers Needed
- Supports Listening & Speaking

USB 2.0 External Stereo Sound Adapter

PID: CM129 40964

- Input: USB-A 2.0 male
- Output 1: 3.5mm jack for headset (green)
- Output 2: 3.5mm jack for mic (red)
- Output 3: 3.5mm CTA 4-pole combo mic/headset jack
- Quickly mute headset and mic with just one button; voice volume control



- Superb Stereo Sound Quality
- No Drivers Needed
- Supports Listening & Speaking



Bluetooth 5.3 Adapter

PID: CM591 90225

- 20m Broad Operation Range
- Mutual Data Transfer
- Pairs with up to 5 Devices



Faster & More Stable

Upgraded Bluetooth 5.3

CD-level High fidelity Stereo Sound

44.1kHz high sampling rate offers studio-quality sound.



Hard Drive Carrying Case
PID: LP128 40707

- Material: Waterproof EVA
- Zipper mesh pocket
- Anti-skid elastic straps
- Polyester foaming absorber



- Larger Storage Space
- Scratch-resistant
- Shock-absorbing

Laptop Backpack
PID: LP664 90798

- Eco-friendly material
- Stereoscopic, simple, and stylish
- 600D high-quality Oxford cloth
- Soft, waterproof, and wear-resistant fabric
- Shock-absorbing and anti-compression pearl cotton lining



- Soft-padded Interior
- Well-organized Storage
- Shock-absorbing

Cable Management Sleeve
PID: LP121 30818

- Diameter: 25mm/1.0in
- Material: PE
- Cable management solution (can accommodate up to 12 Ethernet cables)
- Prevents pets from chewing the cables



- Keeps Cables Safe
- Built to Last
- Organizes up to 12 Ethernet Cables

Presentation Remote
PID: LP479 50654

- Control Distance: 100 m/328 ft
- Laser Distance: >200 m/656 ft
- Laser Power: 0.5-0.95mW
- Power Supply: a AAA battery
- Supports hyperlinks, switch windows



- Up to 100 m/328 ft Operating Range
- Bright Red Laser
- One-click Hyperlink

Portable Laptop Bag
PID: LP437 30325

- 3 Layers Protection
- Splash-Resistant oxford fabric
- Padded foam interior for better protection
- Designed with main pocket, front and back pockets for various storage needs.



- Lightweight and Portable
- Soft-padded & Shock-absorbing
- Splash-proof

Foldable Laptop Stand
PID: LP451 40289

- Compatible with mobile phones up to 17.3"
- Foldable, portable, and travel-friendly design
- Height adjustment: 46.5mm-136.5mm
- Stable structure
- Load-bearing up to 5kg/11.0lbs.



- Foldable and Portable
- Multi-angle Adjustment
- Stable and Secure

38-in-1 Aluminum Alloy Precision Screwdriver Set
PID: CM372 80459

- Product Details:
 - Aluminum Alloy Handle: L94mm
 - Magnetic Extension Bar: L60mm
 - Screw Bits: L28mm
- Screw Bits Dimension (4x28mm)
- Aluminum alloy handle
- Magnetic extension bar



- Durable Cr-V Steel & 60HRC Hardness
- With 36 Screwdriver Bits
- Magnetic Tip for Secure Hold

Desktop USB Microphone
PID: CM379 10934

- Smart noise-cancelling
- Pickup Pattern: Omnidirectional
- Sampling Rate: 16-bit/48 kHz
- Adjust the volume through the device
- Applicability: Online course/meeting/live streaming/singing/gaming



- Clear Sound Quality
- Stable Signal for Clear Calls
- Mute Audio with One Click



Adjustable Laptop Stand

PID: LP339 40291

- Adjustable Height and Angle
- Foldable for Easy Storage
- Hollowed for Heat Dissipation

Dual Axis Design
Height/Angle Adjustable

Adjust the angle and height you want



PS: The height of the base shaft can reach 201mm or more when the angle is 70°

Full Aluminum Alloy Material

Stable and no shaking

3.5mm Aluminum plate

280*230mm plate Big and safe

Damping shaft Do not fall

Support arm Bulky gaming notebook also stable

216*198mm base Stable and place saving

PS: The above data is tested by Ugreen Lab

UGREEN

فقط با گارانتی آسان پیشرو